

Perfo 16/16/8 mm

Perfo offers robust, efficient room acoustic, sound insulation and absorption technology for applications that demand maximum stability and resilience. The ideal acoustic solution for sports halls, public areas or large multi-purpose arenas.



Front	Veneer / laminate / RAL/NCS
Substrate	MDF B2/B1/gypsum fibreboard A2
Back	Non-woven material
Fire rating	As required
Substrate thickness	16 / 19 mm
Perforation	Through hole diameter 1.5–10 mm, axial spacing 32 / 16 / 8 mm
Rear perforation	Hole diameter < 3 mm = grooved back
Edge finishing	Raw, clean cut
Installation	Pocket holes or invisible as required

Optimum board formats based on substrate and finish.



Further formats available on request.

Board width – MDF/ gypsum fibreboard	400 / 600 / 1200
Board length – MDF	3150 / 2750 / 2400 / 1200
Board length – gypsum fibreboard	3000 / 2500

Max. formats	Length	Width	Thickness
MDF	4000	1200	16 / 19
Gypsum fibreboard	3000	600	16 / 19

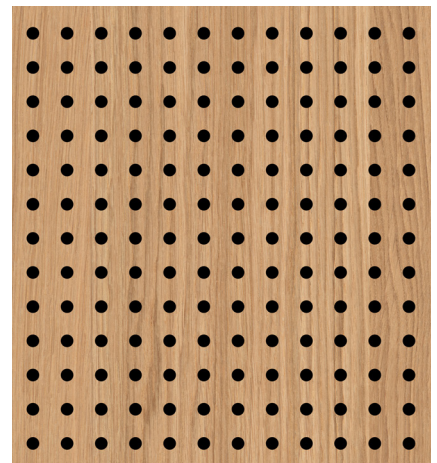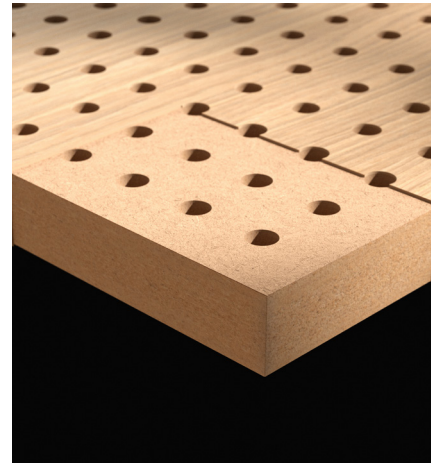

Sound absorption Perfo 16/16/8mm

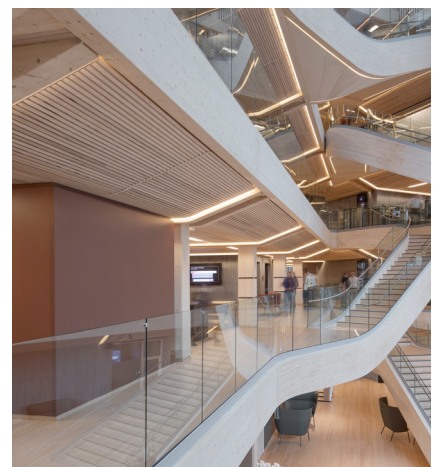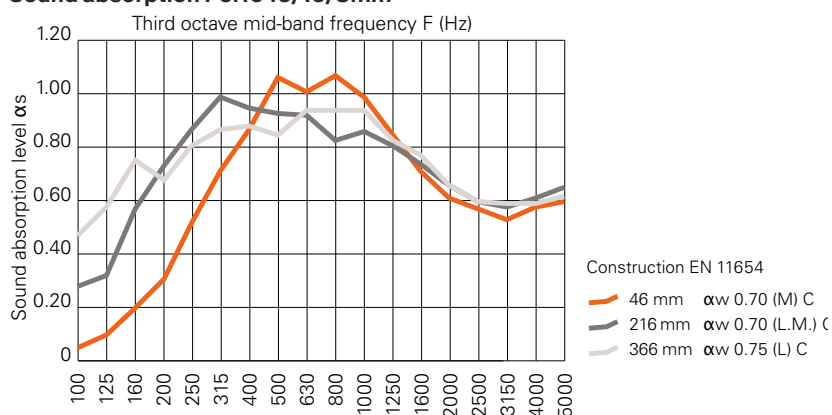

acsono

acsono ag | Eggasse 4a | 4852 Rothrist | Switzerland
T: +41 62 205 24 24 | info@acsono.com | acsono.com

Find out more now:
acsono.com/perfo

